

Positioning Stand Instructions

Box Contents: One Positioning (Mic) Stand with Boom Extension Arm & 2 Clips (as pictured above). Use the Palm **Clip Holder** to hold your Palm, as pictured above & below. The **2 Black Securing Bands** (as pictured below) will be taped to your invoice.

1. Open the box and remove the contents. (reference #1 picture above)
2. Loosen the screw knob that holds the mic boom adjacent to the stand rod, then adjust it horizontal to the vertical stand rod as shown above. (reference #2 in picture above)
3. Open up the three metal leg stands at the bottom of the stand, then loosen the knob screw and adjust the main stand rod, then tighten. (reference #3 in picture above)
4. Use the middle clutch height hand adjustment on the vertical main stand rod to raise or lower by tightening or unloosening. (reference #4 in picture above)
5. Screw on the **Palm Clip Holder** at the end of the boom extension and secure the Palm within the clip using the small **black securing band** provided with the clip. (see below)
6. Adjust all positioning as needed for your personal needs.



Facing Front View




Palm Clip Holder
attach to boom arm



*This Clip Holder
can be discarded*



2 Black Securing Bands
Taped to you invoice

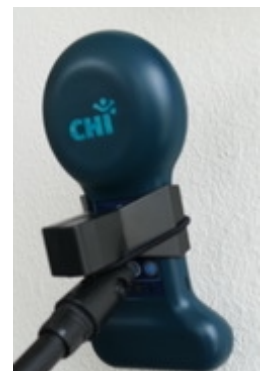

Secure black band around
the Palm to the clip holder



Clip for the Positioning Stand

There is a removable threaded insert which gives the option for your clip to be attached to your positioning stand depending on the size of the threaded insert side. This small piece can be taken off or left in to accommodate the size needed. (see above picture for example)

